



Delivering an ultimate visual experience in large size.

Fast installation and mobility, ready to use instantly.

## 135-Inch Foldable and Height-Adjustable All-in-One LED Display



Easy Install & Maintenance



2K HD Visual Feast



Wide Viewing Angle

### Supports 2K High Definition, Android 9.0 System

2K visual feast, Powerful performance on a foldable LED display. Easy control (Android 9.0, Quad-Core CPU, 4GB RAM + 64 ROM).

### Wireless Projection, Video Conferencing Supported

Project anything, anywhere. Seamless connection to multimedia devices and video conferencing for effortless presentations and meetings.

### Built-In Electric Lift and Mobile Stand, Adjustable Height

65cm electric lift with remote/button control. Store 3 presets for customized comfort in any workspace.

### Foldable Screen with Portable Case


Foldable design and slim carrying case reduce packaging by 50%. Go everywhere with your entertainment, effortlessly.

### No Assembly Required, Instant Setup.

All-in-one wonder. LED modules, controls, case, and stand - come together for a stunning 135-inch display. Set up in minutes.

### Portable Aviation Case for Safer Transport

Travel worry-free. Our robust aviation case shields your stunning LED display, ensuring seamless transport across any location.

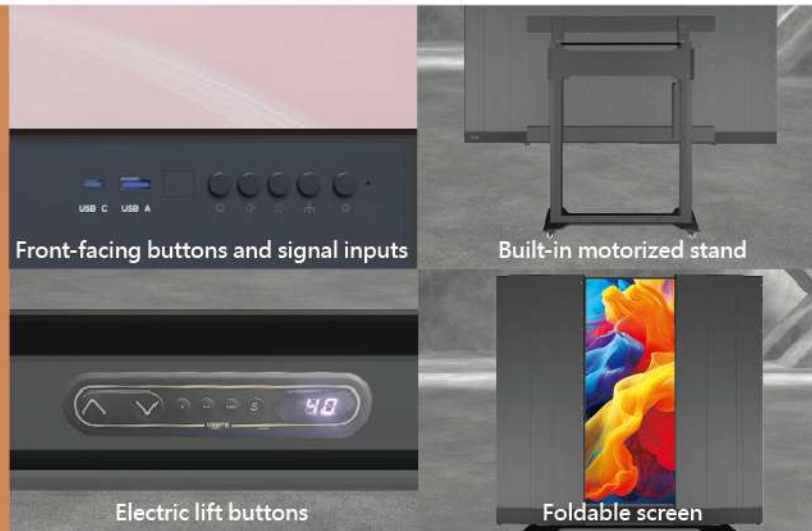

Front-facing buttons and signal inputs

Built-in motorized stand

Electric lift buttons

Foldable screen

No need to worry about complicated setups. Just power on the display and start using it



## PRODUCT SPECIFICATION

### Raising and Folding LED Display

LED Type	LEDP135	Operating System Version	Android 9.0
Model	SMD1212	Operating Memory	4G
Pixel Pitch	1.5625mm	Storage Memory	64G
Pixel Density	409600dots/m <sup>2</sup>	Refresh Rate	3840Hz
Module Size	(D)300x(H)168.75mm	Gray Scale	14Bit
Pixel Composition	10x10 Grid	Audio Output	2x20W
Screen Resolution	1920*1080	Brightness	100-600cd/m <sup>2</sup>
External Dimensions	1804 x 1948 x 770 (Folded down with base)	Service Life	100,000hr
	3010 x 2598 x 770 (Unfolded & lift with base)	Contrast	6000 : 1
Display Dimensions	3000*1688mm	Color Gamut	≥110% NTSC
Horizontal / Vertical Viewing Angle	160°/160°	Input Voltage	AC100~240V 50/60HZ
Average Power Consumption	840W/pcs	Maximum Power Consumption	2900W/pcs
Operating Temp. / Humidity	Operating -10°C~40°C / 10%~90%	Storage Temp. / Humidity	Storage-10°C~60°C / 10%~80%
Screen Net Weight	125kg	Weight of Mobile Base	130kg
Weight of the Aviation Case	160kg	Waterproof and Dustproof Rating	IP30
Installation method	Lift Stand	Maintenance Method	Front maintenance
Signal Input	HDMI1.4 IN×2 · HDMI2.0 IN×2 · HDMI2.1 IN×1 · USB2.0×2 · USB3.0×1 · Type C ×1		
Signal Output	HDMI2.0 OUT×1 · Audio OUT×1 · S/PDIF OUT×1 · RJ45×1 · RS232×1		

\*Specifications based on actual product. We reserve the right to modify without prior notice.

